

T5 HIGH OUTPUT  
FLUORESCENT

# J-FT03124HO


## 24W High Output Fluorescent Track Fixture Heads

Catalog # : \_\_\_\_\_

Project : \_\_\_\_\_

Type : \_\_\_\_\_

Comments : \_\_\_\_\_

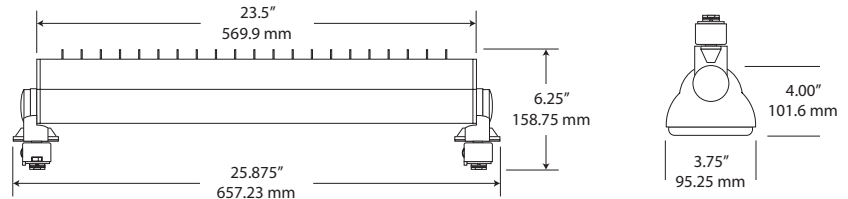

### DESCRIPTION

2-ft track mounted, energy efficient, high output fluorescent fixture. Combines a super compact, single 24W high output T5 linear style. Suitable for retail and commercial wall wash and display lighting. Available in one colour: White.

### DESIGN FEATURES

• **Features**

- Single piece extruded aluminum housing.
- Die cast end caps.
- Dual positioning swivels on track adapters.
- Powder coated paint finish.
- Smooth and clean appearance.

• **Reflector**

- Specular aluminum reflector.
- Precision reflection angles provides smooth illumination along wall space.

• **Louver**

- Color matching white powder coated louver that blends with housing.
- No tools hidden fasteners for easy removal.

• **Mounting**

- Integral track mounting adapters.
- Track polarity indicator.
- On/off switch on mounting adapter.

• **Lamp**

- One 24W, high output T5, fluorescent lamp (not included).
- Average lamp ratings: 20,000 hours.

• **Ballast**

- Rapid start ballast.
- Minimum Starting temp: -20°C.
- Electronic energy efficient ballast.
- Low harmonic distortion, with sound rating of "A" for quiet operation.
- End-of-life automatic shut-off circuit protection.

• **Input/Output**

- 120V 60Hz

• **Accessories**

- See Track accessories in our Catalogue.

• **Availability**

- Available with Juno® and Lightolier® track heads. For Lightolier® track head replace prefix with "L".

### Ordering Information

Cat. No.	Finish
-- J-FT03124HO	-- -WH : White

Example : J-FT03124HO-WH

\* Juno® is a registered trademark of Juno Lighting.

\* Lightolier® is a registered trademark of Canlyte.



**Liteline Corporation**  
8 Abacus Road, Brampton, ON  
L6T 5B7

Tel: 416-996-1856  
Fax: 905-794-1990

Email: sales@liteline.com  
Website: liteline.com

# PHOTOMETRIC

J-FT03124H0

Catalog # : \_\_\_\_\_

Project : \_\_\_\_\_

Type : \_\_\_\_\_

Comments : \_\_\_\_\_

## 1 x 24W T5H0

### Footcandles on Wall

Track 3 Feet from wall, 10' mounting height, tilted 45 degrees

		Single Unit						Multiple Units								
		0'	1'	2'	3'	4'	5'	3' On Center		4' On Center		5' On Center				
Distance From Ceiling		▼						▼	▼	▼	▼	▼	▼	▼		
	1'	55	40	19	8	4	1	73	64	73	63	41	63	58	26	58
	2'	32	25	15	8	4	2	50	46	50	40	32	40	36	23	36
	3'	17	14	10	6	3	2	31	30	31	24	22	24	21	16	21
	4'	11	10	7	5	3	2	24	24	24	18	18	18	15	14	15
	5'	8	7	6	4	3	2	19	19	19	14	14	14	12	11	12
	6'	6	5	4	3	2	2	15	15	15	11	11	11	9	9	9
	7'	4	4	3	3	2	1	12	12	12	9	9	9	7	7	7
	8'	3	3	2	2	2	1	9	9	9	7	7	7	6	6	6
	9'	2	2	2	2	1	1	7	7	7	6	6	6	5	5	5
		▼ is the beam center														

Track 4 Feet from wall, 10' mounting height, tilted 45 degrees

		Single Unit						Multiple Units								
		0'	1'	2'	3'	4'	5'	3' On Center		4' On Center		5' On Center				
Distance From Ceiling		▼						▼	▼	▼	▼	▼	▼	▼		
	1'	31	26	16	8	4	2	51	50	51	41	35	41	36	25	36
	2'	25	21	14	8	5	3	45	44	45	36	32	36	31	24	31
	3'	15	13	10	7	4	3	32	31	32	25	23	25	21	18	21
	4'	9	9	7	5	3	2	23	22	23	17	17	17	14	13	14
	5'	7	6	5	4	3	2	19	19	19	14	14	14	12	11	12
	6'	5	5	4	3	3	2	16	16	16	12	12	12	10	9	10
	7'	4	4	3	3	2	2	13	13	13	10	10	10	8	8	8
	8'	3	3	3	2	2	1	11	11	11	8	8	8	7	7	7
	9'	2	2	2	2	2	1	9	9	9	7	7	7	6	6	6
		▼ is the beam center														

